



TM8250 CONVENTIONAL MOBILE RADIO

The robust, high performance TM8250 mobile radio is the ideal choice for fast-moving mobile teams who rely on instant voice and data communications.

Intuitive interface

- Large LCD display - 14 characters x 4 lines of alphanumeric text
- User-friendly menu structure for easy navigation
- Four programmable function keys
- Optional keypad microphone for enhanced dialling capability

Flexible communications

- 1,500 conventional channels with built-in CTCSS and DCS
- Data capable - supports 1200 baud FFSK data as standard
- Internal high speed data modem - software option
- 300 scanning/voting groups and 26 channel zones
- Full Selcall functionality
- Displays and supports short data messages via CCDI (Computer Controlled Data Interface)
- Voice inversion scrambling
- MDC 1200 Encode - software option

Advanced system integration capabilities

- Multiple auxiliary ports and expansive internal options area
- Direct Connect GPS and GPS display option

Control head options

The remote head option allows the user to mount the TM8250 control head away from the radio body, allowing greater vehicle installation flexibility. The TM8250 also supports a dual control head configuration, allowing the radio to be shared with other users.

Engineered to be tough

The TM8250 meets stringent reliability specifications, including MIL-STD 810 C, D, E, F and IP54.

Software feature upgrades



The Software Feature Enabler (SFE) allows users to upgrade with additional functionality at any stage by simply purchasing the appropriate software license key.

Improved data integrity

The application of Digital Signal Processor (DSP) technology optimises RF performance and ensures fast and reliable data processing.

Ease of integration

The system integrator has maximum design flexibility with multiple ports for auxiliary connectors and a large options board area. The comprehensive third party developer's kit provides integrators with hardware and software tools to facilitate customisation.

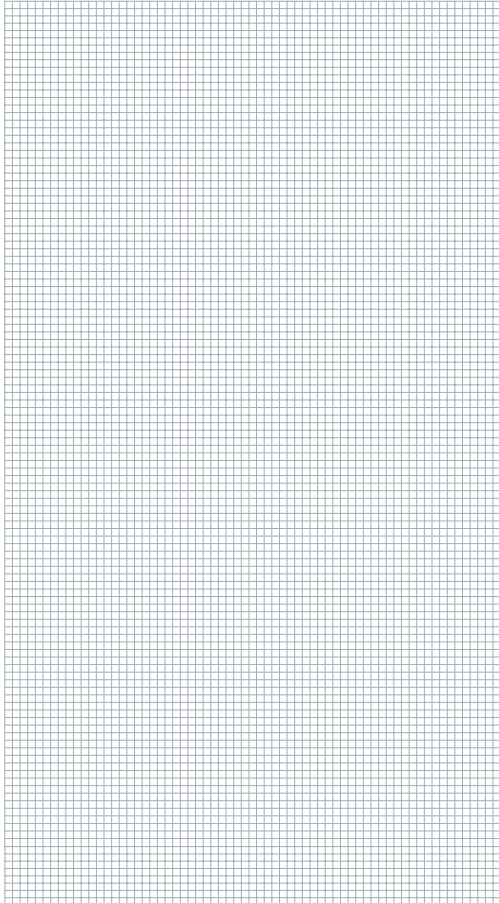

All values quoted are typical. Specifications are subject to change without notice and shall not form part of any contract. They are issued for guidance purposes only. Some features are enabled but can depend on network deployed. * Please note that not all frequency bands and power outputs are available in all markets. For further information please check with your nearest Tait authorised dealer or at www.taitworld.com.

The word Tait and the Tait logo are trademarks of Tait Electronics Ltd. Tait is an ISO9001: 2000 and ISO 14001: 2004 certified supplier.

AUTHORISED DEALER

illawarra
communications
Professional Radio & Paging Communication Specialists

www.taitworld.com

TM8250 Specifications

General

	Band	Operational Frequency	Transmit Power*	
VHF	A4	66-88MHz	25W	
	B1	136-174MHz	25W	
	B1	136-174MHz	50W	
	C0	174-225MHz	25W	
	D1	216-266MHz	25W	
UHF	G2	350-400MHz	40W	
	H5	400-470MHz	25W	
	H5	400-470MHz	40W	
	H6	450-530MHz	25W	
	H7	450-520MHz	40W	
	700/800MHz	K5	762-776MHz	35W (>806MHz)
			792-825MHz	
850-870MHz			850-870MHz	
Frequency Stability	±1.5ppm			
Channel/Network Capacity	1500 Conventional Channels 300 Scan/Vote Groups			
Power Supply	10 8-16VDC			
Channel Spacing	12.5/20/25kHz			
Channel Increment	7.5/12.5/15/20/25/30kHz			
Dimensions (DxWxH)	185 x 182 x 70mm (7.3 x 7.2 x 2.8in)			
25W	1.6kg (56.4oz)			
30/35/40/50W	205 x 182 x 70mm (8.1 x 7.2 x 2.8in)			
Weight	1.4kg (49.4oz)			
25W	1.6kg (56.4oz)			
30/35/40/50W	-30°C to +60°C (-22°F to +140°F)			
Operational Temperature	IP54			
Sealing	50 ohm BNC or Mini UHF			
RF Connector	3 Interface Connectors with Serial Ports			
Interface Connectors	>3W			
Internal Speaker Output				

Military Standards 810 F*

Applicable MIL-STD	Method	Procedure
Low Pressure	500.4	2
High Temperature	501.4	1, 2
Low Temperature	502.4	1, 2
Temperature Shock	503.4	1
Solar Radiation	505.4	1
Rain	506.4	1, 3
Humidity	507.4	1
Salt Fog	509.4	1
Dust	510.4	1
Vibration	514.5	1
Shock	516.5	1, 6

* ALSO MEETS EQUIVALENT SUPERSEDED MIL-STD 810 C, D & E.

Transmitter

	VHF/UHF (TIA/EIA)	700/800MHz (TIA/EIA)
Output Power	25W, 12W, 5W, 1W	30W, 15W, 5W, 2W
25W		35W, 15W, 5W, 2W
30W		
35W		
40W UHF	40W, 20W, 15W, 10W	
50W VHF	50W, 25W, 15W, 10W	
Modulation Limiting	±2.5kHz	±2.5kHz
12.5kHz	±4kHz	±4kHz
20kHz	±5kHz	±5kHz
25kHz		
FM Hum and Noise	-38dB	-33dB
12.5kHz	-41dB	-38dB
20kHz	-43dB	-40dB
25kHz		
Conducted/Radiated Emissions	-36dBm to 1GHz	< -30dBm to 8GHz
	-30dBm above 1GHz	
Audio Response Bandwidth	300Hz-3kHz	300Hz-3kHz
Audio Response	Flat or pre-emphasised	Flat or pre-emphasised
Audio Distortion	< 3% at 1kHz 60% deviation	< 3% at 1kHz 60% deviation
Transmit Rise Time	20ms	20ms
Duty Cycle	33%	20%
25W		
30/35W		
40/50W		

Receiver

	VHF/UHF (TIA/EIA)	700/800MHz (TIA/EIA)
Sensitivity	<-118dBm (0.28 µV) for 12dB SINAD	-120dBm (0.22µV) for 12dB SINAD <-116dBm (0.35µV) for 20dB SINAD
Intermodulation	75dB	82dB
Selectivity	65dB	67dB
12.5kHz	70dB	75dB
20kHz	75dB	79dB
25kHz		
Spurious Responses	75dB	> 90dB**
Hum and Noise	-40dB	-44dB
12.5kHz	-41dB	-47dB
20kHz	-43dB	-48dB
25kHz		
Audio Response Bandwidth	300Hz-3kHz	300Hz-3kHz
Audio Response	Flat or de-emphasised	Flat or de-emphasised
Audio Distortion	< 3% at 1kHz 60% deviation	< 3% at 1kHz 60% deviation

**Meets class A except 1/2 IF at bottom 4MHz of 700MHz sub-band (69dB) and TOP 4MHz of 800MHz sub-band (66dB).