



TM8254 DUAL MODE MOBILE RADIO

With its hand-held control head, the trunked/conventional TM8254 saves space and is fast and easy to install. It improves fleet and team effectiveness by placing vehicle communications into the hands of the user.

Intuitive interface

- Large LCD display – four lines of alphanumeric text
- Six programmable function keys and alphanumeric keypad

Flexible communications

- 1,500 conventional channels with built-in CTCSS and DCS
- Data capable – supports 2400 baud FFSK data as standard
- Internal high speed data modem – software option
- All MPT 1327 call types
- Multiple network capability - up to four different trunked networks
- Voice inversion scrambling
- Built-in MAP 27 interface as standard
- Supports short data messages and ANI
- Incoming calls can be queued for future reference and call back

Advanced system integration capabilities

- Multiple auxiliary ports and expansive internal options area
- Direct Connect GPS and GPS display option

TM8254

SPECIFICATIONS

Mobile radio in the palm of your hand

The TM8254's hand-held control head allows the angle and distance of the display to be positioned by the user for more accurate communication. Several remote mounting options provide greater installation flexibility; ideal for situations where space is a limiting factor.

Flexible installation

The hand-held control head is ideal for covert installations. The optional break-out box and remote kit mean that the TM8254 can be located in the rear of the vehicle.

Engineered to be tough

The TM8254 and its hand-held control head meet stringent reliability specifications, including MIL-STD 810 C, D, E, F and IP54. These standards ensure performance and reliability are never compromised.

AVL support


The TM8254 supports a standard polling vehicle location format and has a direct connect port for an external GPS receiver – allowing for the development of a complete AVL solution.

Fast switch between modes

Because the automated switch between trunked and conventional modes takes place rapidly, precious time is saved in possible emergency situations.



Custom lenses allow easy identification of multiple radios in the same vehicle*

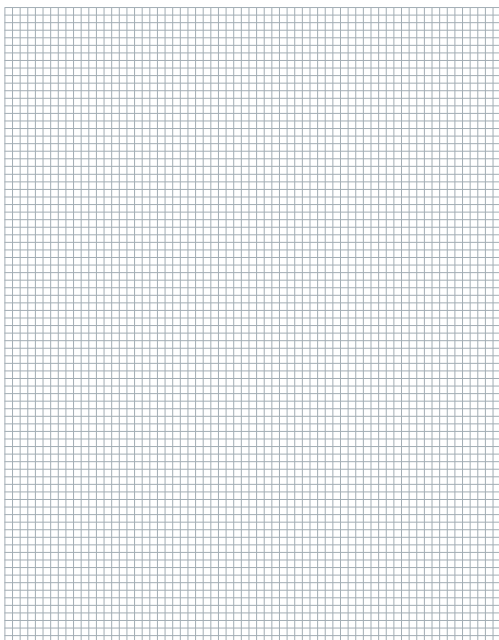

* Minimum order quantities apply.

All values quoted are typical. Specifications are subject to change without notice and shall not form part of any contract. They are issued for guidance purposes only. Some features are enabled but can depend on network deployed. * Please note that not all frequency bands and power outputs are available in all markets. For further information please check with your nearest Tait authorised dealer or at www.taitworld.com.

The word Tait and the Tait logo are trademarks of Tait Electronics Ltd. Tait is an ISO9001: 2000 and ISO 14001: 2004 certified supplier.

AUTHORISED DEALER

illawarra
communications
Professional Radio & Paging Communication Specialists

www.taitworld.com

TM8254 Specifications

General

	Band	Operational Frequency	Transmit Power ⁺
VHF	A4	66-88MHz	25W
	B1	136-174MHz	50W
	C0	174-225MHz	25W
	D1	216-266MHz	25W
UHF	G2	350-400MHz	40W
	H5	400-470MHz	25W
	H5	400-470MHz	40W
	H6	450-530MHz	25W
	H7	450-520MHz	40W
700/800MHz	K5	Transmit 762-776MHz 792-825MHz 850-870MHz	Receive 762-776MHz 850-870MHz 35W (>806MHz) 30W (<806MHz)
Frequency Stability	±1.5ppm		
Channel/Network Capacity	1500 Conventional Channels 300 Scan/Vote Groups 4 MPT 1327 Trunked Networks		
Power Supply	10.8-16VDC		
Channel Spacing	12.5/20/25kHz		
Channel Increment	7.5/12.5/15/20/25/30kHz		
Dimensions (DxWxH)	25W 30/35/40/50W		
Weight	25W 30/35/40/50W		
Operational Temperature	-30°C to +60°C (-22°F to +140°F)		
Sealing	IP54		
RF Connector	50 ohm BNC or Mini UHF		
Interface Connectors	3 Interface Connectors with Serial Ports		
Internal Speaker Output	>3W		

Military Standards 810 F*

Applicable MIL-STD	Method	Procedure
Low Pressure	500.4	2
High Temperature	5014	1, 2
Low Temperature	502.4	1, 2
Temperature Shock	503.4	1
Solar Radiation	505.4	1
Rain	506.4	1, 3
Humidity	507.4	1
Salt Fog	509.4	1
Dust	510.4	1
Vibration	514.5	1
Shock	516.5	1, 6

* ALSO MEETS EQUIVALENT SUPERSEDED MIL-STD 810 C, D & E.

Transmitter

	VHF/UHF (TIA/EIA)	700/800MHz (TIA/EIA)
Output Power	25W, 12W, 5W, 1W	30W, 15W, 5W, 2W
25W		35W, 15W, 5W, 2W
30W		
35W		
40W UHF	40W, 20W, 15W, 10W	
50W VHF	50W, 25W, 15W, 10W	
Modulation Limiting	±2.5kHz	±2.5kHz
12.5kHz	±4kHz	±4kHz
20kHz	±5kHz	±5kHz
25kHz		
FM Hum and Noise	-39dB	-33dB
12.5kHz	-41dB	-38dB
20kHz	-43dB	-40dB
25kHz		
Conducted/Radiated Emissions	-36dBm < 1GHz -30dBm > 1GHz	< -30dBm to 8GHz
Audio Response Bandwidth	300Hz-3kHz	300Hz-3kHz
Audio Response	Flat or pre-emphasised	Flat or pre-emphasised
Audio Distortion	< 3% at 1kHz 60% deviation	< 3% at 1kHz 60% deviation
Transmit Rise Time	20ms	20ms
Duty Cycle	33%	20%
25W		
30/35W		
40/50W		

Receiver

	VHF/UHF (TIA/EIA)	700/800MHz (TIA/EIA)
Sensitivity	< -118dBm (0.28 µV) for 12dB SINAD	-120dBm (0.22 µV) for 12dB SINAD < -116dBm (0.35 µV) for 20dB SINAD
Intermodulation	75dB	82dB
Selectivity	65dB	67dB
12.5kHz	70dB	75dB
20kHz	75dB	79dB
25kHz		
Spurious Responses	75dB	> 90dB**
Hum and Noise	-40dB	-44dB
12.5kHz	-41dB	-47dB
20kHz	-43dB	-48dB
25kHz		
Audio Response Bandwidth	300Hz-3kHz	300Hz-3kHz
Audio Response	Flat or de-emphasised	Flat or de-emphasised
Audio Distortion	< 3% at 1kHz 60% deviation	< 3% at 1kHz 60% deviation

**Meets class A except 1/2 IF at bottom 4MHz of 700MHz sub-band (69dB) and TOP 4MHz of 800MHz sub-band (66dB).